




110 105 00 910 D | white

control.x | 5000 mm
track

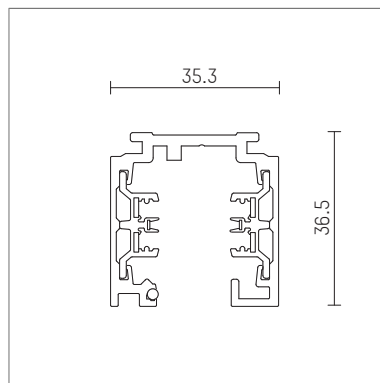

- track control.x 5000 mm
- for surface mounting or suspended mounting
- VDE-compliant 3 (5)-circuit tracks
- control cables (DALI or 1-10V) integrated in a touch-proof manner
- compatible with new DALI adapters and all conventional Hoffmeister 3-circuit adapters
- mixed operation of different adapters is no problem
- Can also be used to operate emergency lighting luminaires
- control.x and 3-circuit accessories can be used
- tracks made of a stable, extruded aluminium profile
- 3 x 16A for particularly long track systems
- approved to be used within easy reach
- the track can be cut without reworking the copper conductors
- material: aluminium
- length: 5000 mm, width: 35,3 mm, height: 36,5 mm
- weight: 5,7 kg
- protection rating: IP20
- protection class I
- Made in Germany
- certificates: CE
- colour: white (RAL9016)
- 110 105 00 910 D

- Overview of accessories on the following page / s

110 105 00 910 D
accessory






Optional accessories

| description accessory general | dimensions in mm | item number | pic.-No. |
|---|----------------------------|------------------|----------|
| Steelwire suspension, 2500 mm for control.x tracks or other profile systems | | 095 089 00 000 | 01 |
| Steelwire suspension, 5000 mm for control.x tracks or other profile systems | | 095 680 00 000 | 01 |
| Steelwire suspension, 10.000 mm for control.x tracks or other profile systems | | 095 681 00 000 | 01 |
| control.x adapter, L/N (3-circuit) test-adapter For controlling the installed control.x track-system | LxWxH: 73 x 35,3 x 34 | 110 032 00 721 | 02 |
| end cap | LxWxH: 3 x 35,3 x 36,5 | 110 000 00 910 | 03 |
| end supply connector, 3-circuit earth conductor position: right | LxWxH: 96 x 35,3 x 36,5 | 110 001 00 910 | 04 |
| end supply connector, control.x earth conductor position: right | LxWxH: 96 x 35,3 x 36,5 | 110 001 00 910 D | 04 |
| end supply connector, 3-circuit earth conductor position: left | LxWxH: 96 x 35,3 x 36,5 | 110 002 00 910 | 05 |
| end supply connector, control.x earth conductor position: left | LxWxH: 96 x 35,3 x 36,5 | 110 002 00 910 D | 05 |
| 90° coupler, 3-circuit earth conductor position: outside | LxWxH: 61,7 x 61,7 x 36,5 | 110 003 00 910 | 06 |
| 90° coupler, control.x earth conductor position: outside | LxWxH: 61,7 x 61,7 x 36,5 | 110 003 00 910 D | 06 |
| 90° coupler, 3-circuit earth conductor position: inside | LxWxH: 61,7 x 61,7 x 36,5 | 110 004 00 910 | 07 |
| 90° coupler, control.x earth conductor position: inside | LxWxH: 61,7 x 61,7 x 36,5 | 110 004 00 910 D | 07 |
| 90° coupler, 3-circuit earth conductor position: outside with optional power input | LxWxH: 98,4 x 98,4 x 36,5 | 110 005 00 910 | 08 |
| 90° coupler, control.x earth conductor position: outside with optional power input | LxWxH: 98,4 x 98,4 x 36,5 | 110 005 00 910 D | 08 |
| 90° coupler, 3-circuit earth conductor position: inside with optional power input | LxWxH: 98,4 x 98,4 x 36,5 | 110 006 00 910 | 09 |
| 90° coupler, control.x earth conductor position: inside with optional power input | LxWxH: 98,4 x 98,4 x 36,5 | 110 006 00 910 D | 09 |
| T coupler, 3-circuit earth conductor position: right with optional power input | LxWxH: 161,5 x 98,4 x 36,5 | 110 007 00 910 | 10 |
| T coupler, control.x earth conductor position: right with optional power input | LxWxH: 161,5 x 98,4 x 36,5 | 110 007 00 910 D | 10 |
| T coupler, 3-circuit earth conductor position: left with optional power input | LxWxH: 161,5 x 98,4 x 36,5 | 110 008 00 910 | 11 |
| T coupler, control.x earth conductor position: left with optional power input | LxWxH: 161,5 x 98,4 x 36,5 | 110 008 00 910 D | 11 |

110 105 00 910 D
accessory

Optional accessories

| description accessory general | dimensions in mm | item number | pic.-No. |
|---|------------------------------|------------------|----------|
| X coupler, 3-circuit with optional power input | LxWxH: 161,5 x 161,5 x 36,5 | 110 009 00 910 | 12 |
| X coupler, control.x with optional power input | LxWxH: 161,5 x 161,5 x 36,5 | 110 009 00 910 D | 12 |
| coupler, 3-circuit | LxWxH: 2 x 35,3 x 36,5 | 110 010 00 910 | 13 |
| coupler, control.x | LxWxH: 2 x 35,3 x 36,5 | 110 010 00 910 D | 13 |
| intermediate supply connector, 3-circuit | LxWxH: 161,5 x 35,3 x 36,5 | 110 011 00 910 | 14 |
| intermediate supply connector, control.x | LxWxH: 161,5 x 35,3 x 36,5 | 110 011 00 910 D | 14 |
| Adjustable-coupler, 3-circuit | LxWxH: 124,5 x 124,5 x 124,5 | 110 012 00 910 | 15 |
| Adjustable-coupler, control.x | LxWxH: 124,5 x 124,5 x 124,5 | 110 012 00 910 D | 15 |
| reinforcement, for intermediate supply connector | LxW: 192 x 32 | 110 015 00 910 | 16 |
| reinforcement, for 90° connectors without an optional feed-in | LxW: 75 x 75 | 110 016 00 910 | 16 |
| reinforcement, for 90° connectors with an optional feed-in | LxW: 111,8 x 111,8 | 110 017 00 910 | 16 |
| reinforcement, for T-connectors with an optional feed-in | LxW: 191,5 x 111,8 | 110 018 00 910 | 16 |
| reinforcement, for X connectors with an optional feed-in | LxW: 191,5 x 191,5 | 110 019 00 910 | 16 |
| pendent tube for suspension of tracks | Ø: 13 | 093 700 00 910 | 17 |
| clamp, 2 pieces for ceiling mounted installation for control.x tracks | | 093 710 00 910 | 18 |
| suspension hook for control.x tracks | H: 67 | 093 720 00 910 | 19 |
| clamp, 2 pieces to be mounted on suspended ceilings for control.x tracks | | 093 725 00 910 | 20 |
| reinforcement clamp for reinforcing the joints in the case of suspended tracks for control.x tracks | LxWxH: 132 x 33 x 12 | 093 734 00 910 | 21 |
| wall bracket for wall mounted installation of control.x tracks | LxWxH: 135 x 32 x 100 | 101421 | 22 |
| safety outlet-socket, 1-fach with 3-circuit universal adaptor for control.x tracks | LxWxH: 60 x 60 x 89 | 110 029 00 910 | 23 |
| control.x adapter, DALI for control.x tracks | LxWxH: 77 x 35,3 x 39 | 110 030 00 910 D | 24 |
| control.x adapter, DALI for control.x tracks | LxWxH: 77 x 35,3 x 39 | 110 031 00 910 D | 25 |



110 105 00 910 D
accessory

