




## 117 340 02 910 | white

DL 150 | IP65  
downlight  
LED | 28 W 2700 K

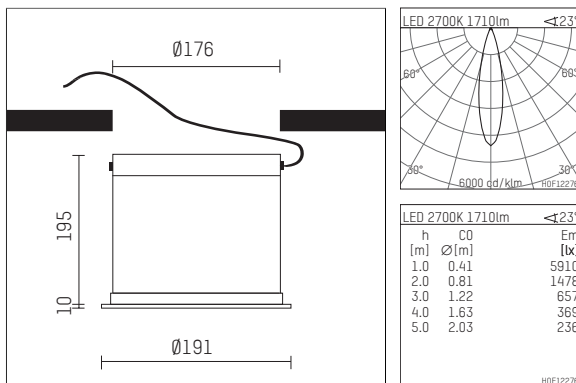

- downlight DL 150 IP65
- with a rim projecting over the ceiling
- for installation into suspended ceilings
- with LED 2100 lm
- colour temperature: 2700 K
- colour rendering index: CRI >90
- L90 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 1710 lm
- total load: 28 W
- luminous efficacy: 61,1 lm/W
- rotationsymmetrical light distribution, medium
- reflector of aluminium, black
- beam angle: 25 °
- UGR: 6
- with built in LED power unit, electronic, 220-240 V, 50/60 Hz
- power supply: push-wire terminal 2x3x2,5 mm<sup>2</sup>
- housing of die cast aluminium
- recessing ring of die cast aluminium
- ceiling trim of die cast aluminium
- the luminaire can subsequently be inset into the ceiling mounting ring
- diameter: 191 mm, recessing diameter: 176 mm
- recessing depth: 195 mm, ceiling thickness: max. 50 mm
- weight: 2,4 kg
- protection rating: IP65
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: white
- 117 340 02 910

- - -