




117 360 04 910 | white

DL 150 | IP65
downlight
LED | 28 W 4000 K

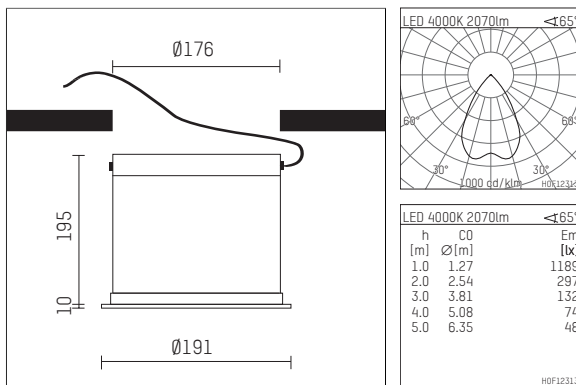

- downlight DL 150 IP65
- with a rim projecting over the ceiling
- for installation into suspended ceilings
- with LED 3150 lm
- colour temperature: 4000 K
- colour rendering index: CRI >80
- L90 / B10 (50.000h)
- SDCM < 3
- net luminous flux: 2070 lm
- total load: 28 W
- luminous efficacy: 73,9 lm/W
- rotationsymmetrical light distribution, wide flood
- reflector of aluminium, black
- beam angle: 65 °
- UGR: 18
- with built in LED power unit, electronic, 220-240 V, 50/60 Hz
- power supply: push-wire terminal 2x3x2,5 mm²
- housing of die cast aluminium
- recessing ring of die cast aluminium
- ceiling trim of die cast aluminium
- the luminaire can subsequently be inset into the ceiling mounting ring
- diameter: 191 mm, recessing diameter: 176 mm
- recessing depth: 195 mm, ceiling thickness: max. 50 mm
- weight: 2,4 kg
- protection rating: IP65
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: white
- 117 360 04 910

- - -