




## 117 440 02 726 | anthracite

DL 150 | IP65  
ceiling mounted luminaire  
LED | 28 W 2700 K

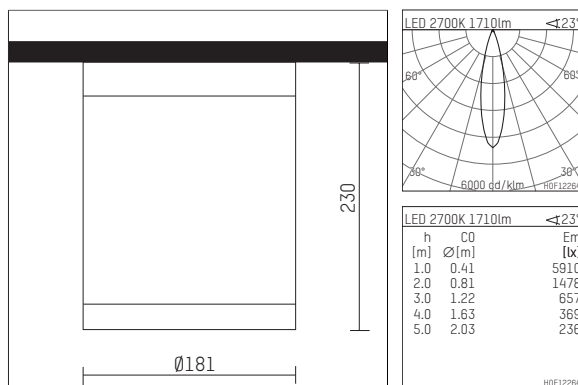

- ceiling mounted luminaire DL 150 IP65
- visible luminaire cover made of clear safety glass, 8 mm
- with LED 1850 lm
- colour temperature: 2700 K
- colour rendering index: CRI >90
- L90 / B10 (50.000h)
- SDCM < 3
- net luminous flux: 1710 lm
- total load: 28 W
- luminous efficacy: 61,1 lm/W
- rotationsymmetrical light distribution, medium
- reflector of aluminium, black
- beam angle:  $25^\circ$
- UGR: 6
- with built in LED power unit, electronic, 220-240 V, 0/50/60 Hz
- power supply: connecting terminal  $3 \times 2,5 \text{ mm}^2$
- 2 cable inputs, suitable for through-wiring  $2 \times 3 \times 1,5 \text{ mm}^2$
- housing of die cast aluminium
- safety glass, clear
- ceiling mounting of die cast aluminium
- height: 230 mm
- diameter: 181 mm
- weight: 3,4 kg
- protection rating: IP65
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: anthracite
- 117 440 02 726

- Overview of accessories on the following page / s

117 440 02 726  
**accessory****Optional accessories**

description accessory general	dimensions in mm	item number	pic.-No.
ring for variable semi-recessing for surface mounted luminaires DL 150	∅: 228	079 040 00 726	01

01