




119 505 04 910 | white

car.a
pendant luminaire
LED | 10 W 4000 K

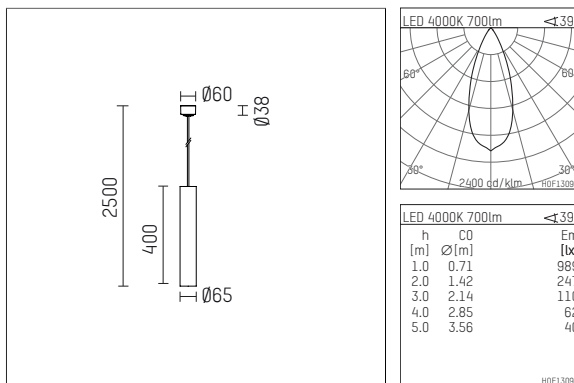

- pendant luminaire car.a
- with canopy
- for surface mounted ceiling installation
- with LED 1050 lm
- colour temperature: 4000 K
- colour rendering index: CRI >80
- L80 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 700 lm
- total load: 10 W
- luminous efficacy: 70,0 lm/W
- rotationsymmetrical light distribution, flood
- beam angle: 40 °
- UGR: 15
- build in LED power unit, electronic, 220-240 V, 50/60 Hz
- Dimming with external dimmers possible (trailing-edge and leading-edge)
- power supply: supply cord 3x0,75 mm², length: 2000 mm
- housing of aluminium
- microprismatic filter with very high rate of light transmission
- height: 400 mm
- diameter: 65 mm, suspension length: 2500 mm
- weight: 1,926 kg
- protection rating: IP20
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: white (RAL9016)
- 119 505 04 910

- - -