



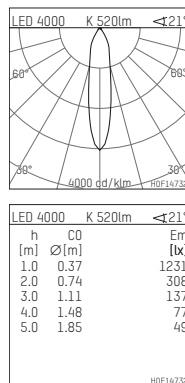

035 051 04 910 | white

DL 50 | LED
downlight
LED COB | 7 W 4000 K

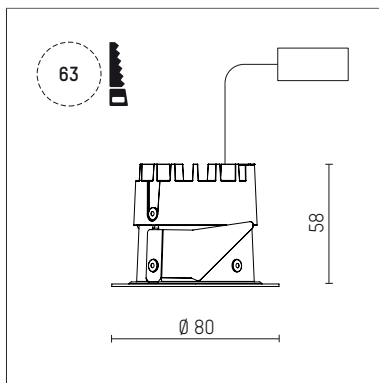

- downlight DL 50 LED
- with a rim projecting over the ceiling
- with LED COB 800 lm
- colour temperature: 4000 K
- colour rendering index: CRI >90
- L80 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 520 lm
- total load: 7 W
- luminous efficacy: 74,3 lm/W
- rotationsymmetrical light distribution, medium
- reflector of highest grade aluminium 99.9%, mirror finish anodised
- cut of angle: 30 °
- UGR: 16
- with external LED power unit, electronic, 220-240 V, 50/60 Hz
- Dimming with external dimmers possible (trailing-edge and leading-edge)
- power supply: supply cord with free conductor end 2x0,75 mm², length: 200 mm
- housing of aluminium and die cast aluminium
- height: 58 mm
- diameter: 80 mm, recessing diameter: 63 mm
- recessing depth: 58 mm, ceiling thickness: 4-25 mm
- weight: 0,22 kg
- protection rating: IP20 IP44 in closed ceiling systems
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: white (RAL9016)
- 035 051 04 910

- - -