




## 071 625 03 902 | stainless steel

hi.vertical 2.0  
inground luminaire  
LED | 14 W 3000 K

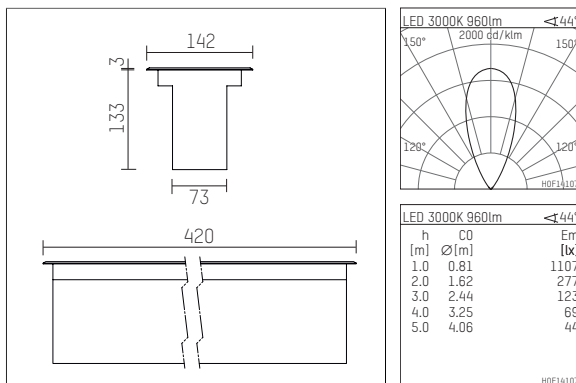

- inground luminaire hi.vertical 2.0
- for mounting into separate in-ground housing
- with LED 1350 lm
- colour temperature: 3000 K
- colour rendering index: CRI >90
- L80 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 960 lm
- total load: 14 W
- luminous efficacy: 68,6 lm/W
- symmetrical light distribution, flood
- beam angle: 45 °
- with built in LED power unit, electronic, 220-240 V, 0/50/60 Hz
- power supply: supply cord, H07RN-F 3x1,5 mm<sup>2</sup>, length: 700 mm
- housing of aluminium and die cast aluminium
- with stainless steel cover frame
- length: 420 mm, width: 142 mm
- recessing depth: 133 mm
- load capacity 1000 kg or 3000 kg with separate installation housing or housing for concrete
- adjustable optics ± 15°, adjustable from outside in operation
- weight: 6,2 kg
- protection rating: IP68 1m / 0,5h
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- maximum ambient temperature: 50 ° C
- impact resistance class: IK10
- certificates: CE, manufactured according to DIN VDE 0711 / EN 60598
- colour: stainless steel
- 071 625 03 902

- Overview of accessories on the following page / s

071 625 03 902  
**accessory**

### Optional accessories

| description accessory general                                                                                               | dimensions in mm       | item number    | pic.-No. |
|-----------------------------------------------------------------------------------------------------------------------------|------------------------|----------------|----------|
| moulded sleeve<br>for connecting to an underground cable                                                                    | LxWxH: 150 x 75 x 50   | 071 213 00 000 | 01       |
| connection sleeve IP68<br>for ground recessed luminaire                                                                     | ØxL: 26,5 x 116        | 071 212 00 000 | 02       |
| housing for concrete cast, made of stainless steel, up to 3t load capacity<br>for ground recessed luminaire hi.vertical 2.0 | LxWxH: 462 x 116 x 184 | 071 691 00 000 | 03       |
| in-ground housing<br>for ground recessed luminaire hi.vertical 2.0 - up to 3t load capacity                                 | LxWxH: 466 x 174 x 173 | 071 696 00 000 | 04       |

