




## 109 300 03 910 RD | white

complx.200 | IP65  
ceiling recessed luminaire  
LED | 26 W 3000 K

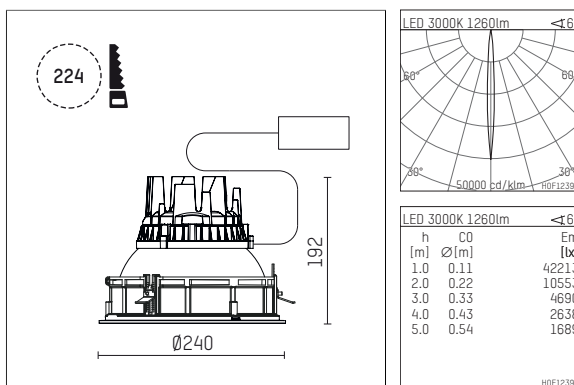

- ceiling recessed luminaire complx.200 IP65
- with a rim projecting over the ceiling
- for installation into suspended ceilings
- with LED 1700 lm
- colour temperature: 3000 K
- colour rendering index: CRI 90
- L90 / B10 (50.000h)
- SDCM < 3
- net luminous flux: 1260 lm
- total load: 26 W
- luminous efficacy: 48,5 lm/W
- rotationsymmetrical light distribution, narrow spot
- safety cable for reflector module
- darklight reflector of aluminium, mirror finish anodised
- cut of angle: 30 °
- beam angle: 5 °
- UGR: -1
- with external LED power unit, electronic (DALI), 220-240 V, 0/50/60 Hz
- temperature-controlled LED circuit board (NTC)
- dimmable
- dimming range: 100-1 %
- power supply: push-wire terminal 2x5x2,5 mm²
- with IP68 cable gland
- housing of die cast aluminium
- safety glass, clear
- recessing ring of die cast aluminium
- cooling element of aluminium
- height: 187 mm
- diameter: 240 mm, recessing diameter: 224 mm
- recessing depth: 192 mm, ceiling thickness: 4-35 mm
- weight: 4,1 kg
- protection rating: IP65
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: white (RAL9016)
- 109 300 03 910 RD

- - -