




## 109 723 03 910 RD | white

complx.100 | IP65  
directional spotlight  
LED | 10 W 3000 K

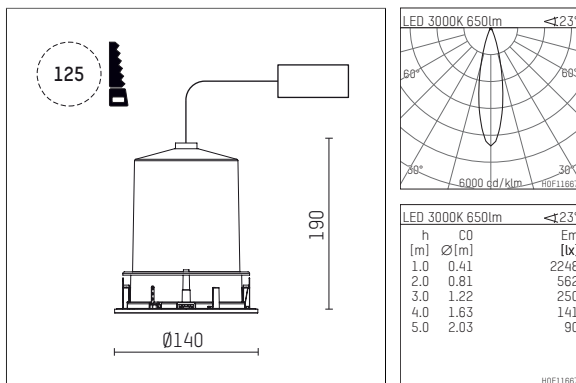

- directional spotlight complx.100 IP65
- with a rim projecting over the ceiling
- for installation into suspended ceilings
- for LED 800 lm
- colour temperature: 3000 K
- colour rendering index: CRI >90
- L90 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 650 lm
- total load: 10 W
- luminous efficacy: 65,0 lm/W
- rotationsymmetrical light distribution, medium
- safety cable for reflector module
- reflector of aluminium, mirror finish anodised
- beam angle:  $25^\circ$
- with external LED power unit, electronic (DALI), 220-240 V, 0/50/60 Hz
- amplitude dimming
- dimming range: 100-1 %
- power supply: supply cord 2x0,75 mm<sup>2</sup>, length: 200 mm
- housing of die cast aluminium
- safety glass, clear
- recessing ring of die cast aluminium
- height: 180 mm
- diameter: 145 mm, recessing diameter: 125 mm
- recessing depth: 190 mm, ceiling thickness: 2-25mm
- rotatable 360°, fixable setting, 0°-30° tiltable, fixable setting
- weight: 0,87 kg
- protection rating: IP65 (control gear IP20)
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- impact resistance class: IK08
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: white (RAL9016)
- 109 723 03 910 RD

- Overview of accessories on the following page / s

109 723 03 910 RD  
**accessory**

## Optional accessories

| description accessory general  | dimensions in mm | item number    | pic.-No. |
|--|------------------|----------------|----------|
| IP65 box for LED-Power unit<br>Without power unit (included with DL100 downlight)<br>The recessing depth of the downlight increases(please refer to the mounting instruction for correct values) |                  | 119 000 00 721 | 01       |

