




## 109 731 02 910 R | white

complx.100 | IP65  
directional spotlight  
LED | 14 W 2700 K

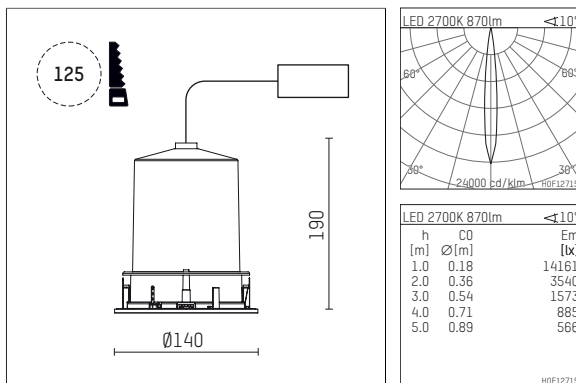

- directional spotlight complx.100 IP65
- with a rim projecting over the ceiling
- for installation into suspended ceilings
- for LED 1060 lm
- colour temperature: 2700 K
- colour rendering index: CRI >90
- L90 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 870 lm
- total load: 14 W
- luminous efficacy: 62,1 lm/W
- rotationsymmetrical light distribution, spot
- safety cable for reflector module
- reflector of aluminium, mirror finish anodised
- beam angle:  $10^\circ$
- with external LED power unit, electronic, 220-240 V, 50/60 Hz
- Dimming with external dimmers possible (trailing-edge and leading-edge)
- dimmable
- power supply: supply cord 2x0,75 mm<sup>2</sup>, length: 200 mm
- housing of die cast aluminium
- safety glass, clear
- recessing ring of die cast aluminium
- height: 180 mm
- diameter: 145 mm, recessing diameter: 125 mm
- recessing depth: 190 mm, ceiling thickness: 2-25mm
- rotatable 360°, fixable setting, 0°-30° tiltable, fixable setting
- weight: 0,95 kg
- protection rating: IP65 (control gear IP20)
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- impact resistance class: IK08
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: white (RAL9016)
- 109 731 02 910 R

- Overview of accessories on the following page / s

109 731 02 910 R  
**accessory****Optional accessories**

description accessory general	dimensions in mm	item number	pic.-No.
IP65 box for LED-Power unit Without power unit (included with DL100 downlight) The recessing depth of the downlight increases(please refer to the mounting instruction for correct values)		119 000 00 721	01

