




109 731 04 910 RD | white

complx.100 | IP65
directional spotlight
LED | 14 W 4000 K

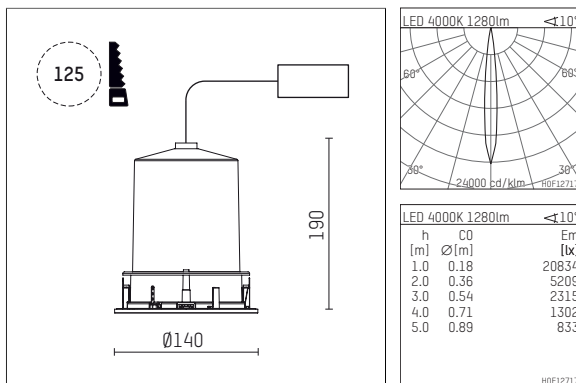

- directional spotlight complx.100 IP65
- with a rim projecting over the ceiling
- for installation into suspended ceilings
- for LED 1560 lm
- colour temperature: 4000 K
- colour rendering index: CRI >80
- L90 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 1280 lm
- total load: 14 W
- luminous efficacy: 91,4 lm/W
- rotationsymmetrical light distribution, spot
- safety cable for reflector module
- reflector of aluminium, mirror finish anodised
- beam angle: 10 °
- with external LED power unit, electronic (DALI), 220-240 V, 0/50/60 Hz
- amplitude dimming
- dimming range: 100-1 %
- power supply: supply cord 2x0,75 mm², length: 200 mm
- housing of die cast aluminium
- safety glass, clear
- recessing ring of die cast aluminium
- height: 180 mm
- diameter: 145 mm, recessing diameter: 125 mm
- recessing depth: 190 mm, ceiling thickness: 2-25mm
- rotatable 360°, fixable setting, 0°-30° tiltable, fixable setting
- weight: 0,95 kg
- protection rating: IP65 (control gear IP20)
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- impact resistance class: IK08
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: white (RAL9016)
- 109 731 04 910 RD

- Overview of accessories on the following page / s

109 731 04 910 RD
accessory

Optional accessories

| description accessory general | dimensions in mm | item number | pic.-No. |
|--|------------------|----------------|----------|
| IP65 box for LED-Power unit Without power unit (included with DL100 downlight) The recessing depth of the downlight increases(please refer to the mounting instruction for correct values) | | 119 000 00 721 | 01 |

