




## 11233512 910-PA | white

gin.o 3  
lens wall floodlight  
LED | 28 W 2700 K

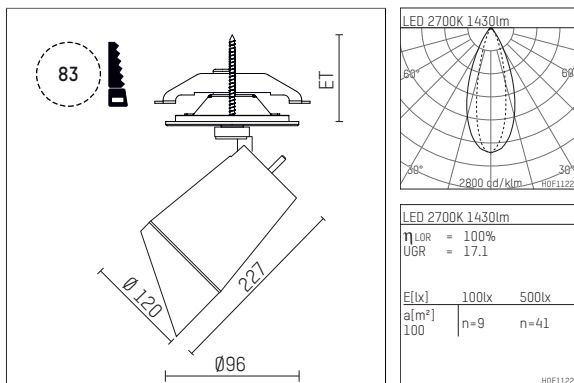

- lens wall floodlight gin.o 3
- with recessed mounting plate
- for recessed installation into wall or ceiling
- lens wall floodlight for homogenous wall illumination
- passive thermo management
- with LED 2100 lm
- colour temperature: 2700 K
- colour rendering index: CRI >90
- L90 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 1430 lm
- total load: 28 W
- luminous efficacy: 51,1 lm/W
- asymmetrical light distribution
- soft-lens optic with secondary reflector
- with external LED power unit, electronic, 220-240 V, 0/50/60 Hz
- amplitude dimming
- dimming range: 100-1 %
- power supply: supply cord with plug connection 2x5x2,5 mm<sup>2</sup>, length: 360 mm
- suitable for through wiring
- housing of die cast aluminium
- ceiling plate of die cast aluminium
- color-, protection- and conversion-filters are available as accessory
- diameter: 96 mm, recessing diameter: 83 mm
- recessing depth: 103 mm, ceiling thickness: 1-45 mm
- rotatable 360°, 90° tiltable
- weight: 2,6 kg
- protection rating: IP20
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- maximum ambient temperature: 35 ° C
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: white (RAL9016)
- 11233512 910-PA

- Overview of accessories on the following page / s

11233512 910-PA  
**accessory****Optional accessories**

description accessory general	dimensions in mm	item number	pic.-No.
colour filter sheet set of 10 sheets for spotlights gin.o and lo.nely size 3	LxW: 119,5 x 119,5	105 779-HT019	01
antiglare flaps for spotlights gin.o and lo.nely size 3		105757	02

