




## 114 500 00 910 | white

in.line 2.0  
emergency luminaire  
LED | 3 W 6500 K

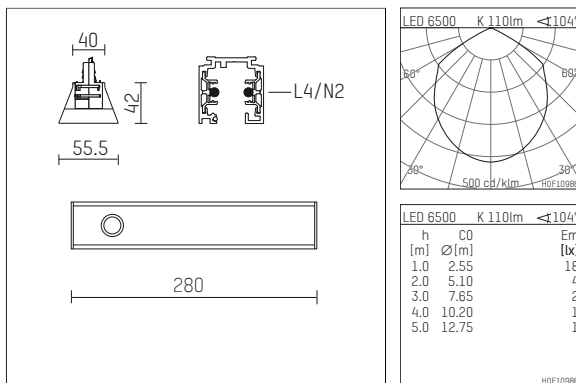

- emergency luminaire in.line 2.0
- with Hoffmeister adapter
- for Hoffmeister control.x tracks
- adapter integrated into luminaire profile, operational on the face
- mounting on the track without tools
- supply through additional 4th phase and separate neutral lead of the control.x track
- protected locking mechanism
- with LED 109 lm
- colour temperature: 6500 K
- net luminous flux: 110 lm
- total load: 3 W
- luminous efficacy: 36,7 lm/W
- symmetrical light distribution
- UGR: 25
- with built in LED power unit, 220-240 V, 50/60 Hz
- electronic control gear NIMH battery
- housing of aluminium
- adapter of fibreglass reinforced thermoplastic
- integrated monitoring LED with auto testing function
- length: 280 mm, width: 55,3 mm, height: 42 mm
- weight: 0,65 kg
- protection rating: IP20
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: white (RAL9016)
- 114 500 00 910

- - -