



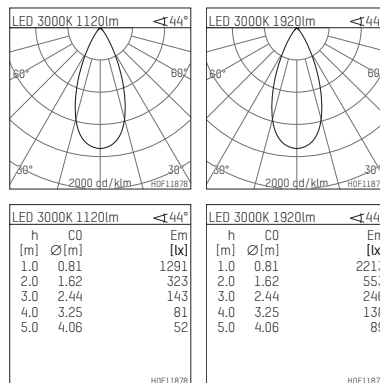

117 035 03 910 | white

led.modular | IP65
linear luminaire
LED | 28 W 3000 K

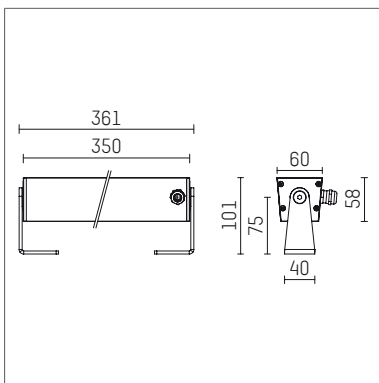

- linear luminaire led.modular IP65
 - adjustable
 - with mounting bracket
 - for installation on wall or ceiling
 - for optimal illumination of vertical facades
 - with LED 2400 lm
 - colour temperature: 3000 K
 - colour rendering index: CRI >90
 - L80 / B10 (50.000h)
 - SDCM < 2
 - net luminous flux: 1920 lm
 - total load: 28 W
 - luminous efficacy: 68,6 lm/W
 - symmetrical light distribution, flood
 - beam angle: 45 °
 - for external control gear
 - temperature-controlled LED circuit board (NTC) optional
 - reduction of system power (14W / 1350lm) is possible
 - secondary connection:
 - supply cord, length: 2000 mm
 - housing of extruded aluminium profile
 - safety glass, clear
 - bracket of stainless steel
 - length: 361 mm, width: 60 mm, height: 100 mm
 - weight: 1,75 kg
 - protection rating: IP65
 - protection class I
 - 5 years Hoffmeister warranty
 - Made in Germany
 - maximum ambient temperature: 50 ° C
 - impact resistance class: IK07
 - certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
 - colour: white
 - 117 035 03 910
- Overview of accessories on the following page / s

117 035 03 910

accessory**Required accessories**

description accessory general	dimensions in mm	item number	pic.-No.
LED power unit, 40W, 350mA with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 092 00 721	01
LED power unit, 40W, 350mA, DALI with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 092 00 721 D	01
LED power unit, 50W, 700mA with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 091 00 721	01
LED power unit, 50W, 700mA, DALI with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 091 00 721 D	01

01