





## 117 036 03 910 | white

led.modular | IP65  
linear luminaire  
LED | 28 W 3000 K

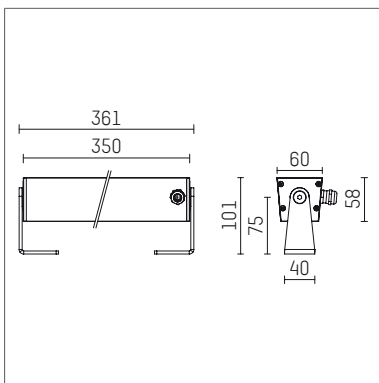

LED 3000K 1130lm					12°
h	CO	C90	Em		
[m]	Ø[m]	Ø[m]	[lx]		
1.0	0.21	0.76	3039		
2.0	0.43	1.51	760		
3.0	0.64	2.27	338		
4.0	0.86	3.02	190		
5.0	1.07	3.78	122		

HOF11868

LED 3000K 1940lm					12°
h	CO	C90	Em		
[m]	Ø[m]	Ø[m]	[lx]		
1.0	0.21	0.76	5217		
2.0	0.43	1.51	1304		
3.0	0.64	2.27	580		
4.0	0.86	3.02	326		
5.0	1.07	3.78	209		

HOF11869

- linear luminaire led.modular IP65
- adjustable
- with mounting bracket
- for installation on wall or ceiling
- for optimal illumination of vertical facades
- with LED 2400 lm
- colour temperature: 3000 K
- colour rendering index: CRI >90
- L80 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 1940 lm
- total load: 28 W
- luminous efficacy: 69,3 lm/W
- oval flood
- for external control gear
- temperature-controlled LED circuit board (NTC) optional
- reduction of system power (14W / 1350lm) is possible
- secondary connection:
- supply cord, length: 2000 mm
- housing of extruded aluminium profile
- safety glass, clear
- bracket of stainless steel
- length: 361 mm, width: 60 mm, height: 100 mm
- weight: 1,75 kg
- protection rating: IP65
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- maximum ambient temperature: 50 ° C
- impact resistance class: IK07
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: white
- 117 036 03 910

- Overview of accessories on the following page / s

117 036 03 910  
**accessory****Required accessories**

description accessory general	dimensions in mm	item number	pic.-No.
LED power unit, 40W, 350mA with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 092 00 721	01
LED power unit, 40W, 350mA, DALI with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 092 00 721 D	01
LED power unit, 50W, 700mA with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 091 00 721	01
LED power unit, 50W, 700mA, DALI with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 091 00 721 D	01

**01**