



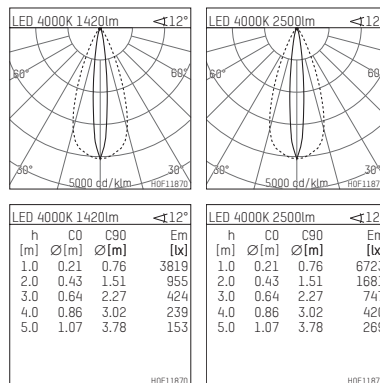

## 117 036 04 726 | anthracite

led.modular | IP65  
linear luminaire  
LED | 28 W 4000 K

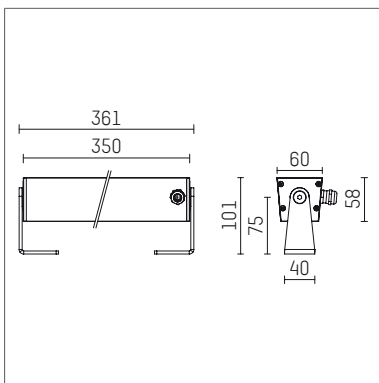

- linear luminaire led.modular IP65
  - adjustable
  - with mounting bracket
  - for installation on wall or ceiling
  - for optimal illumination of vertical facades
  - with LED 3150 lm
  - colour temperature: 4000 K
  - colour rendering index: CRI >80
  - L80 / B10 (50.000h)
  - SDCM < 2
  - net luminous flux: 2500 lm
  - total load: 28 W
  - luminous efficacy: 89,3 lm/W
  - oval flood
  - for external control gear
  - Opens without tools using quarter-turn screw lock optional reduction of system power (14W / 1750lm) is possible
  - secondary connection:
  - supply cord, length: 2000 mm
  - housing of extruded aluminium profile
  - safety glass, clear
  - bracket of stainless steel
  - length: 361 mm, width: 60 mm, height: 100 mm
  - weight: 1,75 kg
  - protection rating: IP65
  - protection class I
  - 5 years Hoffmeister warranty
  - Made in Germany
  - maximum ambient temperature: 50 ° C
  - impact resistance class: IK07
  - certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
  - colour: anthracite
  - 117 036 04 726
- Overview of accessories on the following page / s

117 036 04 726  
**accessory****Required accessories**

description accessory general	dimensions in mm	item number	pic.-No.
LED power unit, 40W, 350mA with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 092 00 721	01
LED power unit, 40W, 350mA, DALI with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 092 00 721 D	01
LED power unit, 50W, 700mA with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 091 00 721	01
LED power unit, 50W, 700mA, DALI with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 091 00 721 D	01

**01**