




117 046 03 726 | anthracite

led.modular | IP65
linear luminaire
LED | 57 W 3000 K

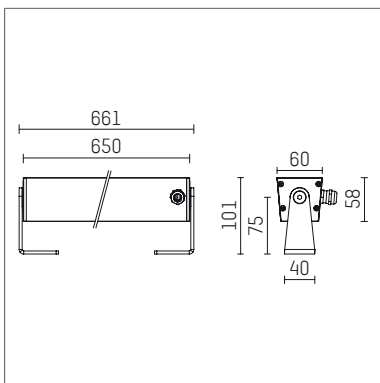

LED 3000K 3880lm 12°
60° 60°
30° 30°
5000 cd/klm HOF11873

LED 3000K 1940lm $\le 12^\circ$					LED 3000K 3880lm $\le 12^\circ$				
h	CO	C90	Em		h	CO	C90	Em	
[m]	\varnothing [m]	\varnothing [m]	[lx]		[m]	\varnothing [m]	\varnothing [m]	[lx]	
1.0	0.21	0.76	5217		1.0	0.21	0.76	10434	
2.0	0.43	1.51	1304		2.0	0.43	1.51	2609	
3.0	0.64	2.27	580		3.0	0.64	2.27	1159	
4.0	0.86	3.02	326		4.0	0.86	3.02	652	
5.0	1.07	3.78	209		5.0	1.07	3.78	417	

- linear luminaire led.modular IP65
- adjustable
- with mounting bracket
- for installation on wall or ceiling
- for optimal illumination of vertical facades
- with LED 4800 lm
- colour temperature: 3000 K
- colour rendering index: CRI >90
- L80 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 3880 lm
- total load: 57 W
- luminous efficacy: 68,1 lm/W
- oval flood
- for external control gear
- temperature-controlled LED circuit board (NTC) optional
- reduction of system power (27W / 2650lm) is possible
- secondary connection:
- supply cord, length: 2000 mm
- housing of extruded aluminium profile
- safety glass, clear
- bracket of stainless steel
- length: 661 mm, width: 60 mm, height: 100 mm
- weight: 2,85 kg
- protection rating: IP65
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- maximum ambient temperature: 50 ° C
- impact resistance class: IK07
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: anthracite
- 117 046 03 726

- Overview of accessories on the following page / s

117 046 03 726

accessory**Required accessories**

description accessory general	dimensions in mm	item number	pic.-No.
LED power unit, 40W, 350mA, DALI with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 092 00 721 D	01
LED power unit, 70W, 700mA, DALI with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 093 00 721 D	01
LED power unit, 40W, 350mA with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 092 00 721	01
LED power unit, 70W, 700mA with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 093 00 721	01

01