




## 117 056 03 910 | white

led.modular | IP65  
linear luminaire  
LED | 83 W 3000 K

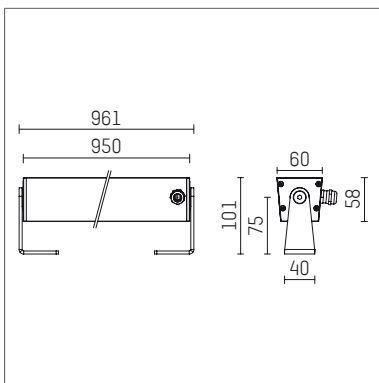

LED 3000K 3360lm					LED 3000K 5830lm				
h	C0	C90	Em		h	C0	C90	Em	
[m]	∅[m]	∅[m]	[lx]		[m]	∅[m]	∅[m]	[lx]	
1.0	0.21	0.76	9036		1.0	0.21	0.76	15678	
2.0	0.43	1.51	2259		2.0	0.43	1.51	3920	
3.0	0.64	2.27	1004		3.0	0.64	2.27	1742	
4.0	0.86	3.02	565		4.0	0.86	3.02	980	
5.0	1.07	3.78	361		5.0	1.07	3.78	627	

- linear luminaire led.modular IP65
- adjustable
- with mounting bracket
- for installation on wall or ceiling
- for optimal illumination of vertical facades
- with LED 6300 lm
- colour temperature: 3000 K
- colour rendering index: CRI >90
- L80 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 5830 lm
- total load: 83 W
- luminous efficacy: 70,2 lm/W
- oval flood
- for external control gear
- temperature-controlled LED circuit board (NTC) optional
- reduction of system power (40W / 4150lm) is possible
- secondary connection:
- supply cord, length: 2000 mm
- housing of extruded aluminium profile
- safety glass, clear
- bracket of stainless steel
- length: 961 mm, width: 60 mm, height: 100 mm
- weight: 3,95 kg
- protection rating: IP65
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- maximum ambient temperature: 50 ° C
- impact resistance class: IK07
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: white
- 117 056 03 910

- Overview of accessories on the following page / s

117 056 03 910

**accessory****Required accessories**

description accessory general	dimensions in mm	item number	pic.-No.
LED power unit, 40W, 350mA, DALI with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 092 00 721 D	01
LED power unit, 40W, 350mA with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 092 00 721	01
LED power unit, 90W, 700mA with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 095 00 721 D	01
LED power unit, 90W, 700mA with high protection rating IP65 for outdoor usage	LxWxH: 220 x 120 x 80	117 095 00 721	01

**01**