




120 964 04 907 R | silver anodised

ak.tina 1
recessed spotlight
LED | 2 W 4000 K

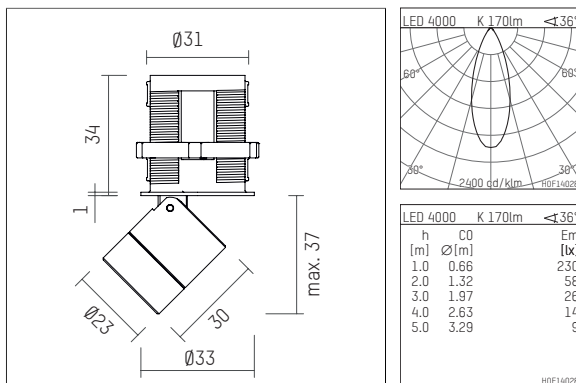


- recessed spotlight ak.tina 1
- minimalistic system for recessed mounting
- with a rim projecting over the ceiling
- for installation into suspended ceilings or casting drums
- with LED 260 lm
- colour temperature: 4000 K
- colour rendering index: CRI >80
- L90 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 170 lm
- total load: 2 W
- luminous efficacy: 85,0 lm/W
- rotationsymmetrical light distribution, flood
- for external control gear
- secondary connection:
- supply cord with plug connection, length: 420 mm
- housing of aluminium
- recessing ring of thermoplastic
- height: 35 mm
- diameter: 33 mm, recessing diameter: 31 mm
- recessing depth: 50 mm, ceiling thickness: 2-25mm
- rotatable 360°, 90° tiltable
- weight: 0,063 kg
- protection rating: IP20
- protection class III
- 5 years Hoffmeister warranty
- Made in Germany
- maximum ambient temperature: 35 ° C
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: silver anodised
- 120 964 04 907 R

- Overview of accessories on the following page / s

120 964 04 907 R
accessory

Required accessories

| description accessory general | dimensions in mm | item number | pic.-No. |
|--|----------------------|------------------|----------|
| LED power unit, 1-10V constant current driver hotplug 700mA, 20W, for max. 6 ak.tina | LxWxH: 149 x 40 x 21 | 120 986 10 000 A | 01 |
| LED power unit, DALI mit Amplitudendimmung constant current driver hotplug 700mA, 20W, for max. 6 ak.tina | LxWxH: 149 x 40 x 21 | 120 986 10 000 D | 01 |
| LED power unit constant current driver hotplug 700mA, 20W, for max. 6 ak.tina | LxWxH: 149 x 40 x 21 | 120 986 10 000 | 01 |



Optional accessories

| description accessory general | dimensions in mm | item number | pic.-No. |
|--|------------------|----------------|----------|
| distributor coupler, 3-fold, with system plug connector for ak.tina | | 120 984 00 721 | 01 |
| distributor coupler, 6-fold, with system plug connector for ak.tina | | 120 985 00 721 | 01 |
| connecting cable, with system plug connector 1500mm for ak.tina | L: 1500 | 120 982 00 721 | 01 |
| connecting cable, with system plug connector 1000mm for ak.tina | L: 1000 | 120 981 00 721 | 01 |
| connecting cable, with system plug connector 2000mm for ak.tina | L: 2000 | 120 983 00 721 | 01 |
| antiglare flaps for ak.tina | | 120 992 00 721 | 02 |
| medium lense, 10 pieces for spotlights ak.tina | | 120 973 00 000 | 03 |
| oval flood lense, 10 pieces for spotlights ak.tina | | 120 976 00 000 | 03 |
| spot lense, 10 pieces for spotlights ak.tina | | 120 972 00 000 | 03 |
| tube screen for ak.tina | | 120 990 00 907 | 04 |
| visor for ak.tina | | 120 991 00 907 | 05 |
| connection ring, with prismatic glass for ak.tina | | 120 996 00 907 | 06 |
| connection ring, with soft.shape lense for ak.tina | | 120 994 00 907 | 06 |
| connection ring, with sculpture lens for ak.tina | | 120 995 00 907 | 06 |

120 964 04 907 R
accessory**Optional accessories**

| description accessory general | dimensions in mm | item number | pic.-No. |
|---|------------------|----------------|----------|
| connection ring, with honeycomb louver for ak.tina | | 120 993 00 907 | 06 |
| connection ring, with wide-flood lense for ak.tina | | 120 997 00 907 | 06 |

