


## 148 232 14 706 | anthracite

multi.flood  
projector  
LED | 112 W 4000 K

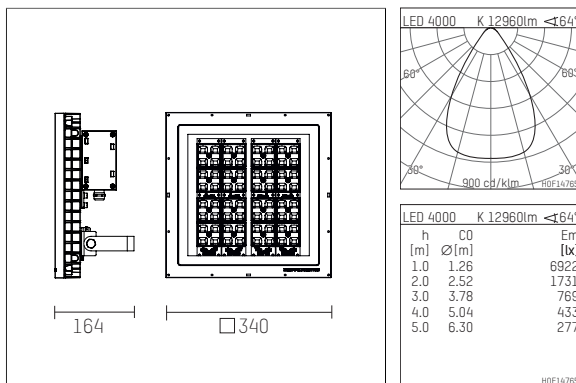

- projector multi.flood
- with mounting bracket
- for wall-, ground or pole-mounting
- with LED 16825 lm
- colour temperature: 4000 K
- colour rendering index: CRI >80
- L90 / B10 (100.000 / ta 25°C)
- SDCM < 4
- net luminous flux: 12960 lm
- total load: 112 W
- luminous efficacy: 115,7 lm/W
- rotationsymmetrical light distribution, flood
- beam angle: 64 °
- attached LED power unit, electronic, 220-240 V, 0/50/60 Hz
- overvoltage protection 6KV
- power supply: connecting terminal 3x2,5 mm<sup>2</sup>
- with a cord connection for power supply cord H07RN-F 3G 1.5 mm<sup>2</sup>
- housing of die cast aluminium
- safety glass, clear
- stainless steel mounting bracket
- length: 340 mm, width: 340 mm, height: 164 mm
- weight: 10,5 kg
- protection rating: IP65
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- maximum ambient temperature: 35 ° C
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: anthracite (RAL7016)
- 148 232 14 706

- - -