




## 12081403 721-PA | black

ak.tina 2  
spotlight  
LED | 8 W 3000 K

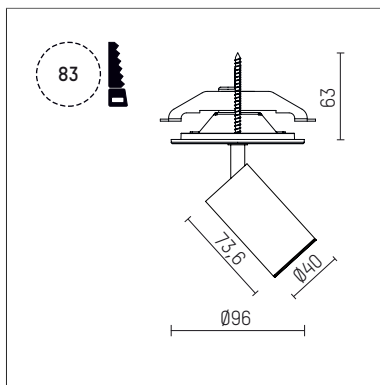

- spotlight ak.tina 2
- with recessed mounting plate
- for recessed installation into wall or ceiling
- with LED 550 lm
- colour temperature: 3000 K
- colour rendering index: CRI >90
- L90 / B10 (50.000h)
- SDCM < 90
- net luminous flux: 320 lm
- total load: 8 W
- luminous efficacy: 40,0 lm/W
- rotationsymmetrical light distribution, medium
- beam angle: 32 °
- with external LED power unit, 220-240 V, 50/60 Hz
- Dimming with external dimmers possible (trailing-edge and leading-edge)
- power supply: supply cord with plug connection  
2x5x2,5 mm<sup>2</sup>, length: 360 mm
- suitable for through wiring
- housing of aluminium
- ceiling plate of die cast aluminium
- diameter: 96 mm, recessing diameter: 83 mm
- recessing depth: 63 mm, ceiling thickness: 1-45 mm
- rotatable 360°, 90° tiltable
- weight: 0,75 kg
- 5 years Hoffmeister warranty
- Made in Germany
- maximum ambient temperature: 35 ° C
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: black
- 12081403 721-PA

---