




## 035 061 04 908 D | chrome

DL 70 | LED  
downlight  
LED COB | 10 W 4000 K

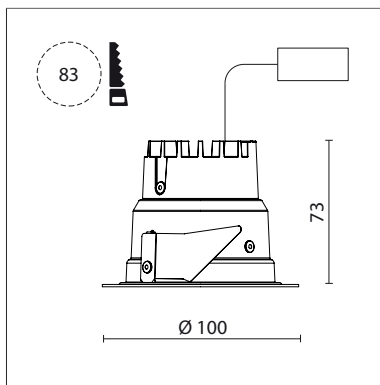

LED 4000 K 700lm <math>\le 17^\circ</math>		
h	CO	Em
[m]	$\varnothing$ [m]	[lx]
1.0	0.30	2295
2.0	0.59	574
3.0	0.89	255
4.0	1.18	143
5.0	1.48	92

HOFFMEISTER

- downlight DL 70 LED
- with a rim projecting over the ceiling
- with LED COB 1050 lm
- colour temperature: 4000 K
- colour rendering index: CRI >90
- L80 / B10 (50.000h)
- SDCM < 2
- net luminous flux: 700 lm
- total load: 10 W
- luminous efficacy: 70,0 lm/W
- rotationsymmetrical light distribution, medium
- reflector of highest grade aluminium 99.9%, mirror finish anodised
- cut of angle: 30 °
- UGR: 14
- with external LED power unit, electronic (DALI), 220-240 V, 0/50/60 Hz
- power supply: supply cord with free conductor end 2x0,75 mm<sup>2</sup>, length: 200 mm
- housing of aluminium and die cast aluminium
- height: 73 mm
- diameter: 100 mm, recessing diameter: 83 mm
- recessing depth: 73 mm, ceiling thickness: 4-25 mm
- weight: 0,22 kg
- protection rating: IP20 IP44 in closed ceiling systems
- protection class I
- 5 years Hoffmeister warranty
- Made in Germany
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE
- colour: chrome
- 035 061 04 908 D

---